


SCREEN₄PRO

Slim Series

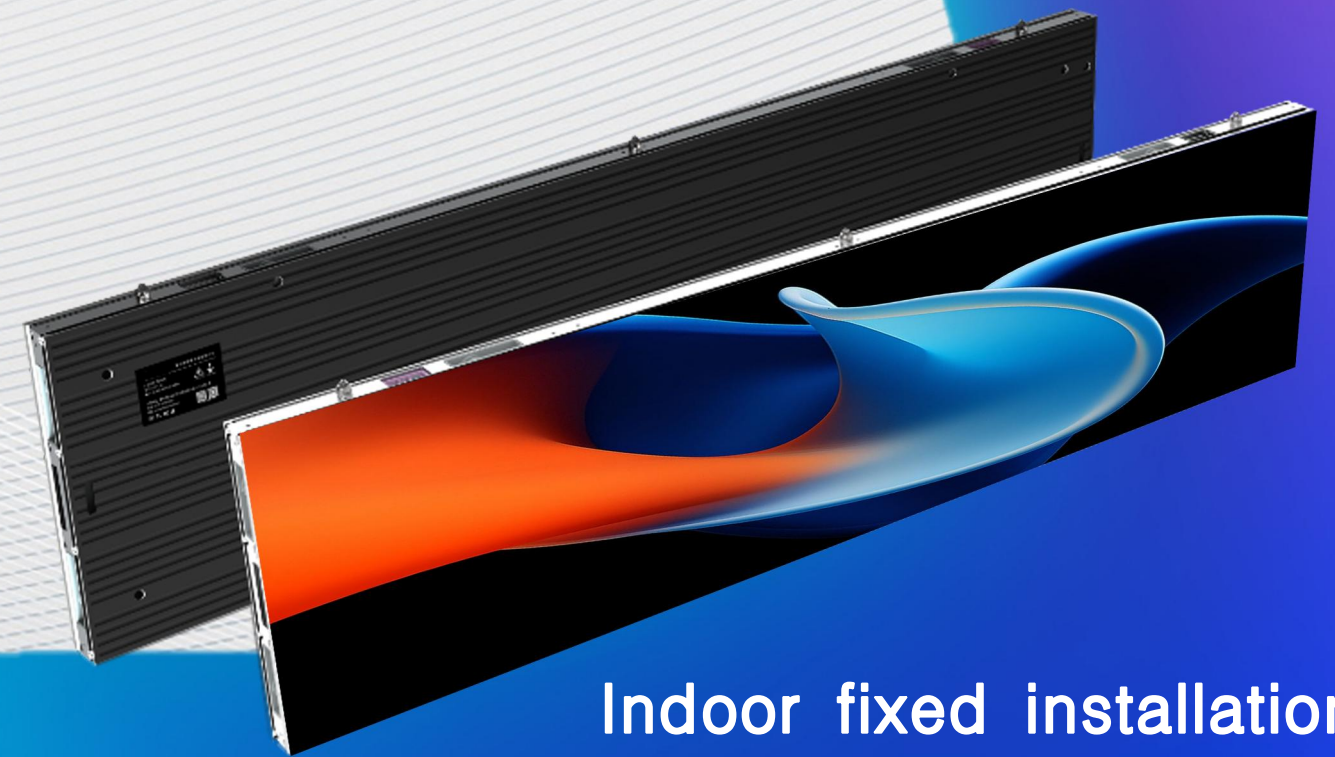


Indoor fixed installation

SCREEN₄PRO

Shenzhen SCREEN4PRO Technology Co., Ltd
Email: sales@screen4protech.com Web: www.screen4protech.com
Add: Songnan Innovation Industrial Park, Guangming District, Shenzhen, China

Shenzhen SCREEN4PRO Technology Co., Ltd

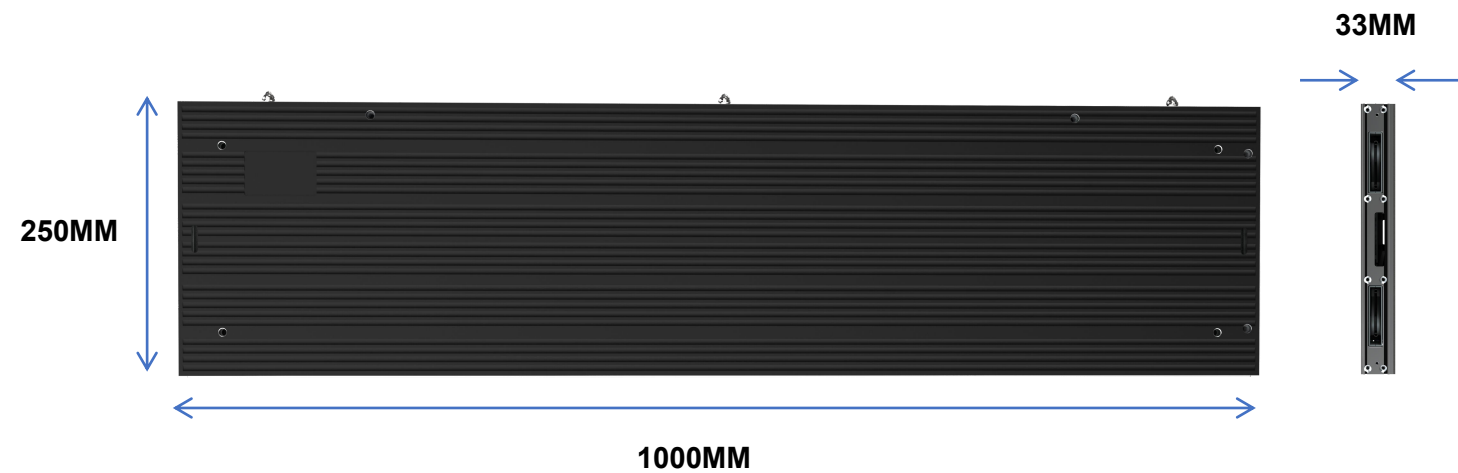

Pixel Pitch	P1.56mm	P1.95mm	P2.5mm	P2.604mm	P2.976mm	P3.91mm
LED Type	SMD1212 (GOB)	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020
Physical density(Dot/sqm)	409600	262144	160000	147456	112896	65536
Module resolution	160X160	128X128	100X100	96X96	84X84	64X64
Module dimension(mm)	250X250	250X250	250X250	250X250	250X250	250X250
Panel size(mm)	1000X250X33	1000X250X33	1000X250X33	1000X250X33	1000X250X33	1000X250X33
Panel resolution	640X160/480X160	512X128/384X128 256X128	400X100/300X100 200X100	384X96/288X96 192X96	336X84/252X84 168X84	256X64/192X64 128X64
Module quantity(WXH)	4X1/3X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1
Maintenance	Front access	Front access	Front access	Front access	Front access	Front access
Cabinet material	Aluminum Profile	Aluminum Profile	Aluminum Profile	Aluminum Profile	Aluminum Profile	Aluminum Profile
Brightness(Nits)	600	800	800	800	800	1000
Color temperature(K)	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional
Gray level	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Brightness/Color uniformity	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%
Contrast	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame frequency	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan
Single point brightness correction	Have	Have	Have	Have	Have	Have
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	650	650	650	650	650	650
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200	100-200
Protection level	IP31	IP31	IP31	IP31	IP31	IP31
Power input	AC90-264V,47-63Hz					
Wroking temperature/humidity(°C/RH)	-20~60°C/10%~85%					
Storage temperature/humidity(°C/RH)	-20~60°C/10%~85%					
Certificatiom	CCC/CE/RoHS/FCC/CB/TUV/IEC					


Front side High contrast

- High contrast corrugated light absorbing mask achieves high contrast



Multiple cabinet size options

- Compatible with various sizes of installation, strong flexibility

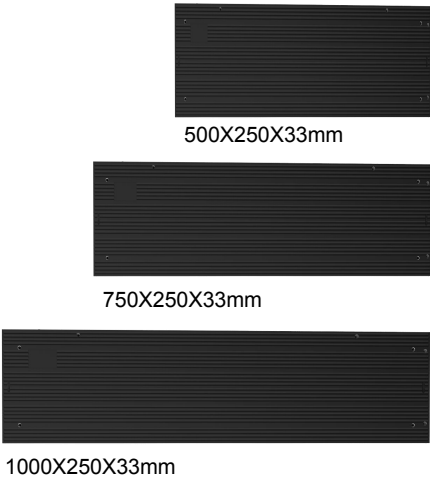


Cabinet is lighter and slimmer

- Cabinet weight :500x250 2.9kg 750x250 4.5kg 1000x250 5.8kg



170°Super wide viewing angle

- Perfect presentation of images from any angle

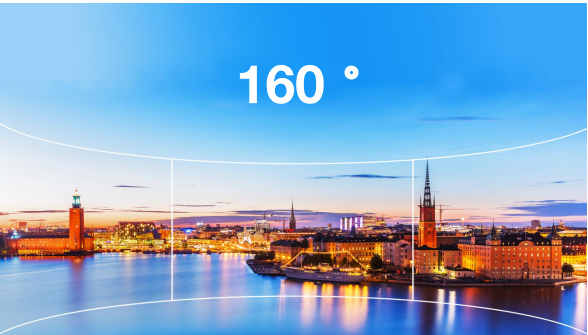

Can be made double-sided

- Double-sided display, the screen can be synchronous or asynchronous

