

SCREEN4^{PRO}

Shenzhen SCREEN4PRO Technology Co., Ltd

Email: sales@screen4protech.com Web:www.screen4protech.com
Add: Songnan Innovation Industrial Park, Guangming District, Shenzhen, China

SCREEN4^{PRO}



TS Series

Create a new visual world



Ultra-light



Ultra-slim



Translucent



Ultra-wide View



High Brightness



IP65



Easy to Move
And Install



Free Combination




Easy to
Maintenance



Energy-saving
Certification

Shenzhen SCREEN4PRO Technology Co., Ltd

Product Features

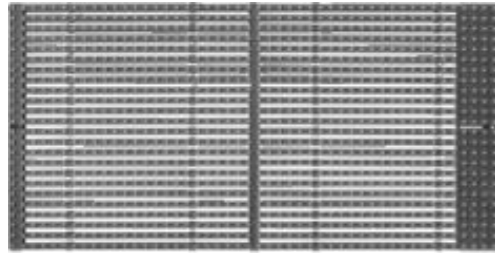

Front Side of The Waterproof Potting Module

Back Side of The Waterproof Potting Module

Easy to Maintenance




Front Maintenance



Rear Maintenance

More Solution

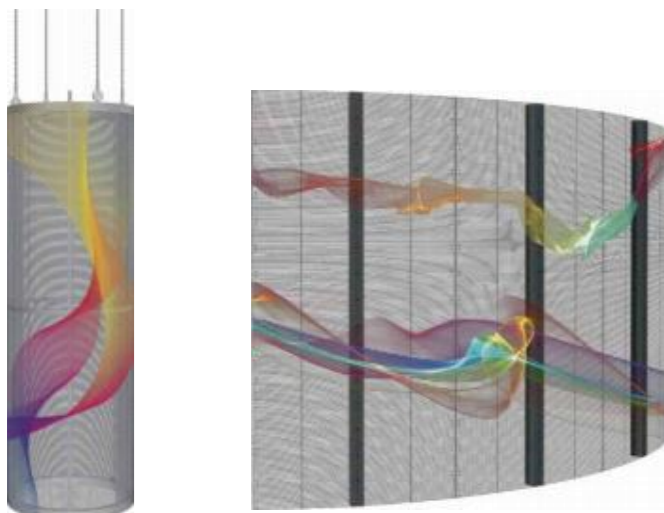

Product Cases



Specification

Product Name	Indoor TS-Mesh				
Product Model	H2-5Ts	H3-7Ts	H5-10Ts	H10-Ts	H15-Ts
Pixel pitch (mm)	H2.6/V5.2	H3.9/V7.8	H5.2/V10.4	H10.4/V10.4	H15.6/V15.6
Pixel density/m ²	73728	32768	18432	9216	4096
LED Type	SMD 1415	SMD 1921	SMD 1921	SMD 2727	SMD 2727
Brightness (nits)	≥4500nit				
Cabinet material	Aluminium Profiles				
Cabinet weight (kg)	15Kg/m ²				
Refresh (Hz)	≥3840				
Processing depth	14bit				
Ingress protection	IP30				
Panel size	1000*500*80mm				
Maintenance mode	Front				
Input voltage	AC100~240V 50/60Hz				
Use environment	Hanging/Stacking/Fixed				
Max power(W/m ²)	800W/m ²				
Average power(W/m ²)	260W/m ²				

Product Name	Outdoor TS-Mesh			
Product Model	H3.9-7.8Ts	H5.2-10.4Ts	H10.4-Ts	H15.6-Ts
Pixel pitch (mm)	3.9-7.8	5.2-10.4	10.4	15.6-15.6
Pixel density/m ²	32768	18432	9216	4096
LED Type	>4500nit	>4500nit	>4500nit	>5500nit
Brightness (nits)	SMD 1921			
Cabinet material	Die casting			
Cabinet weight (kg)	15Kg/m ²			
Refresh (Hz)	>3840			
Processing depth	14bit			
Ingress protection	IP65			
Panel size	1000*500*80mm			
Maintenance mode	Rear			
Input voltage	AC100~240V 50/60Hz			
Use environment	Hanging/Stacking/Fixed			
Max power(W/m ²)	800W/m ²			
Average power(W/m ²)	260W/m ²			